


# CONICAL ARCHES UMBRELLA CAR PARKING SHADE

## مظلة سيارات مخروطية أقواس




- 3-inch pipe thickness of 4 mm.
- 3 inch pipe thickness 3 mm.
- Plate joints to assemble the canopy 12 mm.
- Canvas PVC German ten-year guarantee.
- Fabric (N.E.T.) German-made ten-year guarantee.
- Aluminum for installation cloth 4 cm 1.5 cm.
- Screws 16 mm solid steel with plastic cover for protection.
- Thermal dye is resistant to all weather conditions.
- Cement steel for the foundations of the canopy 100 x 100 x 100 cm.

- مقاطع بايب ( ٣ ) انش سماكة ٤ مم.
- مقاطع بايب ( ٣ ) انش سماكة ٣ مم.
- بليت لتجميع مفاصل المظلة ١٢ مم.
- قماش ( بي في سي ) الماني ضمان عشر سنوات.
- قماش ( N.E.T. ) الماني الصنع ضمان عشر سنوات.
- المنيوم للتثبيت القماش ٤ سم ١,٥ سم.
- براغي ستيل صلب ١٦ مم مع غطاء بلاستيك للحماية.
- صبغ حراري مقاوم لجميع الحالات الجوية.
- أسمنت صلب للأساسات المظلة ١٠٠ x ١٠٠ x ١٠٠ سم.





## Materials



- Tensile strength : 2200/200 N/5cm
- Tear Strength : 280/280 N
- Low Temperature-No Crack At : -30 C
- A : UV resistant .
- B : FR Flame Retardant .
- C : Warranty : 10 years .



- At Leeds we have large stocks of aluminium profiles and extrusions for all forms of tents and shading structures.



- Material : UV stablished HDPE
- Temperature range : -30 C to +75 C
- Tensile Strength - Weft : 635 N/50mm
- Tensile Strength - Weft : 2494 N/50mm
- Bursting Pressure ( Mean ) ( AS 2001.2.4 ) : 3500 kPa
- UV Block : Up to 98.8%
- Warranty : 10 year UV\*



### Kedar

As part of our on-going service to the Marquee and Tent industry. We supply Brithish manufactured tent Kedar. Used to engance and stabilize tents and shades structures  
The Kedar comes in two sizes. ( 8mm and 14mm )  
\* UK Manufactured



ALBASSAM C-014

## CONICAL ARCHES UMBRELLA CAR PARKING SHADE

مظلة سيارات مخروطية أقواس



### WHAT IS HOT DIP GALVANIZING ?

Hot Dip Galvanizing is a form of corrosion protection method, which involves coating an iron or steel structure with molten zinc.




### SCREWS

Stocked in steel | zinc plating.  
• Available in 18-8 stainless steel  
• Hot dipped galvanized, plain, and black oxide.




### GAS EPOXY MIO JOTUN


Paint epoxy high-quality composed of two compounds formed with a thickness large, anti-corrosive, contains chips iron oxide colored layer of a solid buffer against the passage of moisture and air pollutants and reflect UV rays and prevents access to the layer resin.

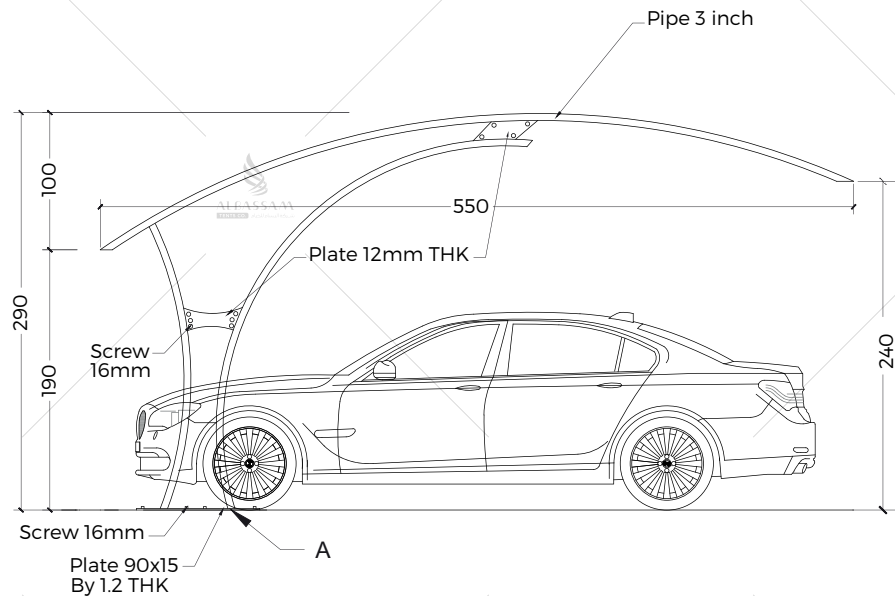

**LIFT VIEW**

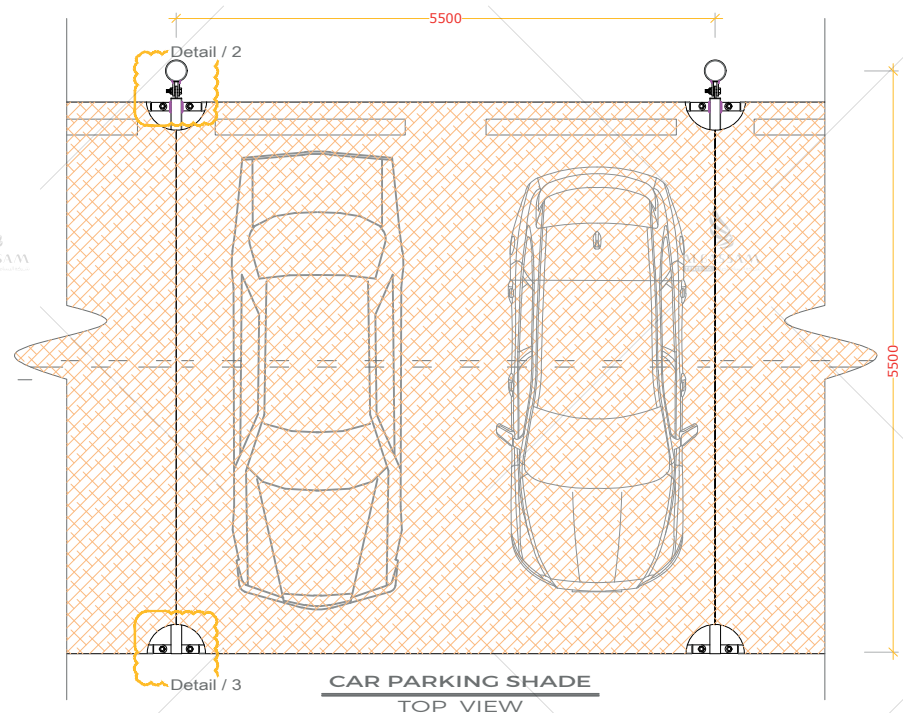

**CAR PARKING SHADE  
TOP VIEW**

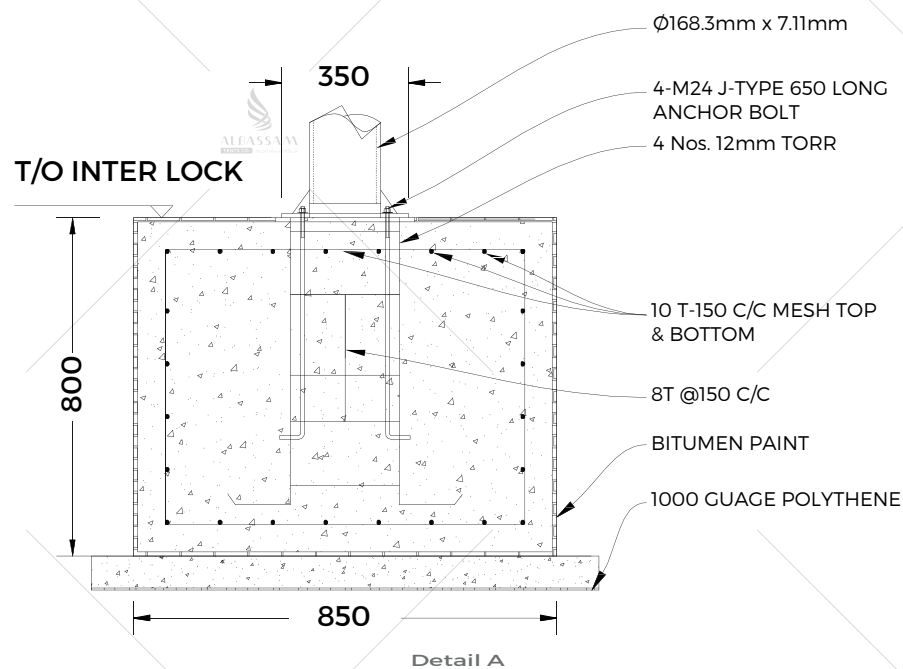

**Detail A**

## Description

|                        |  |
|------------------------|--|
| Size                   | 5500 cm L X 5500 cm W X 240 cm H.  |
| Steel                  | Structure Main pipe / 6" - 5 mm THK. Truss pipe / 2.5" - 3 mm THK.   |
| Fabric Covering        | PVC. 900 g/m <sup>2</sup> <input type="checkbox"/> HDPE. Net cloth <input type="checkbox"/>  |
| Accessories            | All the used accessories (bolts, nut, stiffener...) GI grade 8.8   |
| Footing                | 80 cm L X 80 cm W X 80 cm H. Reinforced concrete with 4 No. anchor bolts grade 8.8 X 24 mm THK.  |
| Warranty               | 10 Years Warranty - Fabric Covering Only   |
| Finishing              | Paint epoxy/epoxy marine<br>The paint its high quality composed of two compounds Formed with a thickness large. anti-corrosive   |
| Steel Quality          | Fabricated Steel Components Hot Dip Galvanized In Accordance To International Standards Such As Astm B6 And En Iso 1461<br>ASTM: American Society For Testing And Materials, International Standards.<br>ISO: International Organization For Standardization   |
| Structural Calculation | Calculation load for the steel structure as per generated to 160 Kmph wind speed According to the requirements of UAE municipalities<br>Design and Practice Codes:<br>- ASTM International American Society for Testing and Materials, International Standards.<br>- BS EN 206-1 Concrete. Specification, Performance, Production and Conformity.<br>- NFPA 5000 Building Construction and safety Code.<br>- ASCE 7-05, CIRIA Report 147 |

**CAR PARKING SHADE  
DESCRIPTION**



